


SMART INDOOR CAMERA



WIFI 5MP Smart Camera

- Wifi connection
- 355 monitoring
- Humanoid detection
- Voice intercom
- Day/ night viewing
- Remote viewing

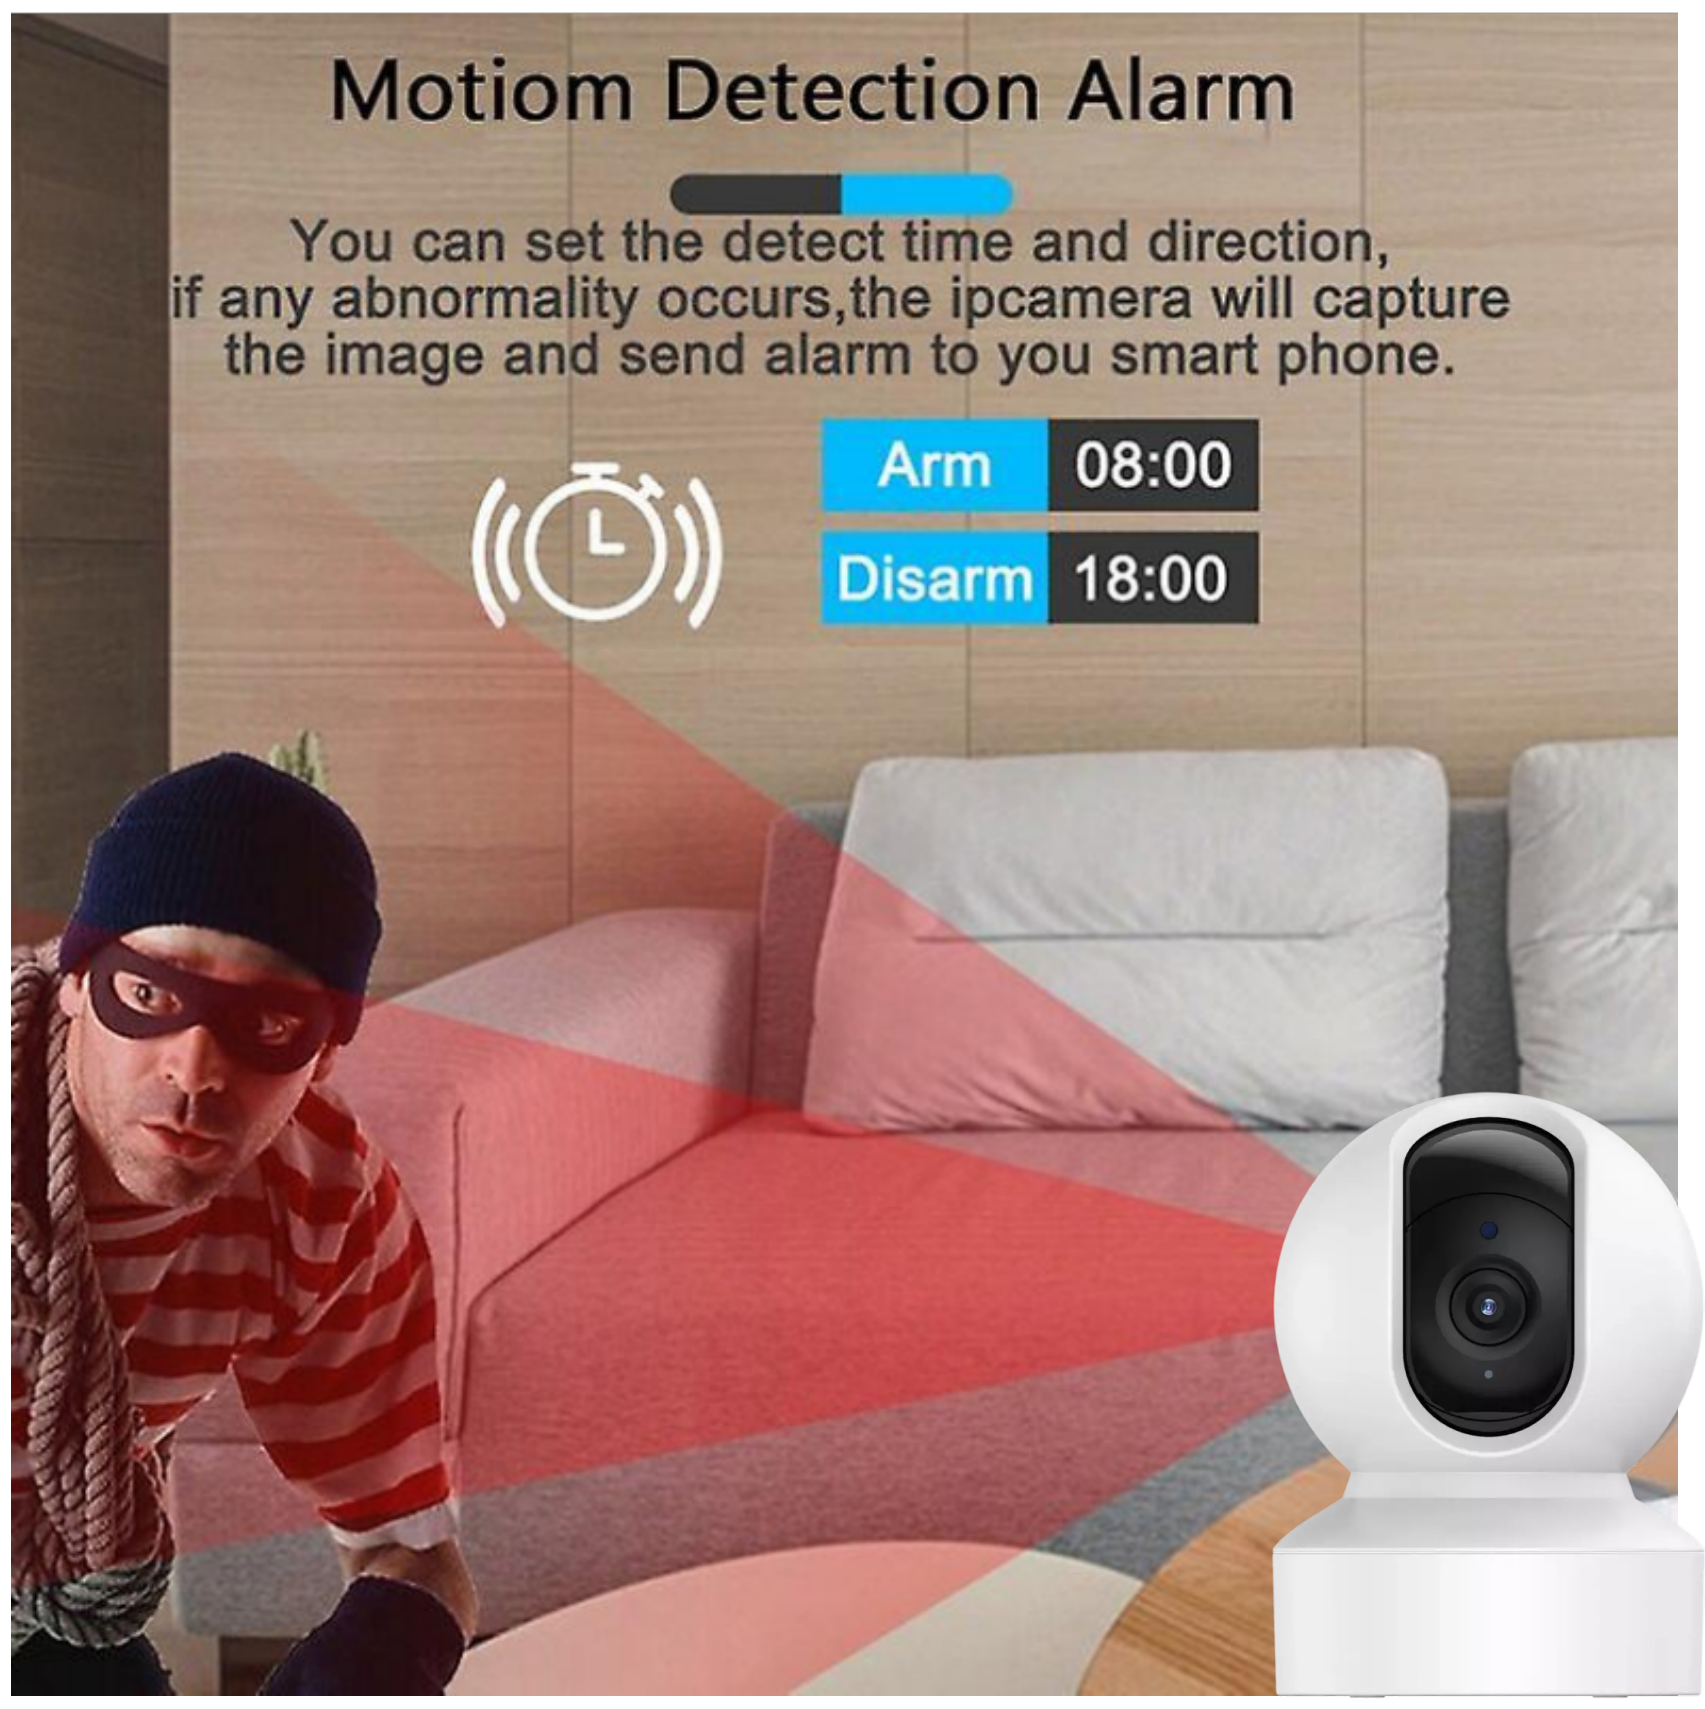

System Features	System security	Adopt Tuya smart cloud platform , financial-level security system
	Support IOS, Android system	Multi-language, multi-category, universal
	local storage	Support external 8-128GB MicroSD card, 24 hours recording
	Remote online upgrade	Easily realize remote OTA online upgrade through Tuya Cloud, and experience the latest version at the first time
	Other	Support Tuya cloud storage function. (Amazon Echo/Google assistant Optional)
	Main control chip platform	Linux operating system, with high-performance DSP processor Fullhan professional SOC
	Image Sensor	1/2.9 5.0M Pixel Progressive Scan CMOS
External interface	interface	Micro SD self-bouncing interface
	Extension ports	Infrared light board interface, power supply, speaker, microphone, TF card holder.
	reset switch	Support
	Video display method	Landscape 16:9
video	compression method	H.264/H.265
	frame frequency	Main stream (HD): 2560*1920@20fps Substream (SD): 640*360@10 fps
	Resolution	5MP (2560*1920)
	Illumination	0.02Lux@(2.0,AGC ON),0Lux with IR
	Video bit rate	Main stream (HD): 1Mbps Sub stream (SD): 384-512Kbps
	lens	Optional (3.6mm/ 6mm/ 8mm)
	mirror / flip	support
Basic functions	Noise Reduction / Dynamic Range	3D noise reduction
	mobile tracking	support
	Voice intercom	Support two-way voice intercom, echo cancellation
	audio input	1 CH MIC
	Audio output	1 CH Speaker (8 Euro 1W/2W/4W)
	Anti-flicker	Support outdoor /50 Hz/60Hz three kinds
	night vision mode	IR-CUT automatic switching
	WIFI connection	2.4G (802.11b/g/n)
	wired connection	optional
	Add method	Support QR code scanning, fast configuration, AP , wired connection
	Network protocol	DHCP
	Motion Detection	support
	local storage	Support TF card to store continuous video / event video, up to 128G micro SD card
Others	Tuya Cloud Storage	Support continuous recording / event recording
	Operating temperature	-5°C ~ 75°C
	Working humidity	10% ~ 95% non-condensing
	Power supply	DC 5V-1A